




# MILL MAX TOOLS

## TUNGSTEN CARBIDE SOLID ROTARY BLANKS

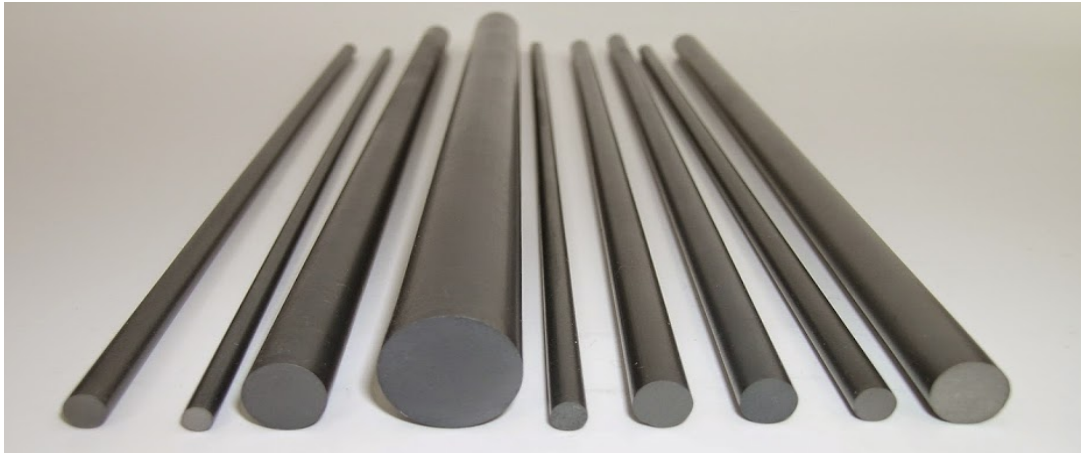

SPECIFICATIONS			
Diameter (mm)	Diameter Tolerance	Length (mm)	Length Tolerance
4.3	+/- 0.05	330	+2.0
5.3	+/- 0.05	330	+2.0
6.3	+/- 0.05	330	+2.0
7.35	+/- 0.05	330	+2.0
8.35	+/- 0.05	330	+2.0
9.35	+/- 0.05	330	+2.0
10.35	+/- 0.05	330	+2.0
12.35	+/- 0.05	330	+2.0
13.35	+/- 0.05	330	+2.0
14.4	+/- 0.05	330	+2.0
16.4	+/- 0.05	330	+2.0
18.4	+/- 0.05	330	+2.0
20.45	+/- 0.05	330	+2.0
22.45	+/- 0.05	330	+2.0
25.45	+/- 0.05	330	+2.0
26.45	+/- 0.05	330	+2.0
28.5	+/- 0.05	330	+2.0
30.5	+/- 0.05	330	+2.0
32.5	+/- 0.05	330	+2.0

### GRADE SPECIFICATIONS:

Binder: 9.5 % Co

Density: 14.4 gm/cm<sup>2</sup>

Hardness: 92 HRA

Transverse Rupture Strength: 3400 N/mm<sup>2</sup>

---

A-369, MIDC Mahape, TTC Indl. Area, Navi Mumbai- 400703 Maharashtra, India  
**Tel:** +91-22-27782222 **Fax:** +91-22-27782223 **Email:** millmaxtools@gmail.com  
**Website:** www.millmax.com